

4000

68

**Valvola a flusso avviato a vite esterna con soffietto**

IT

Bellows sealed stop valve

EN

Robinet à soupape d'arrêt à soufflet

FR


Válvula de Interrupción con Fuelle

ES

VALVOLE A FLUSSO AVVIATO E VALVOLE DI BILANCIAMENTO

GLOBE VALVES AND BALANCING VALVES | ROBINETS À SOUPAPE ET VANNES D'ÉQUILIBRAGE |


VÁLVULAS DE GLOBO Y VÁLVULAS DE EQUILIBRADO

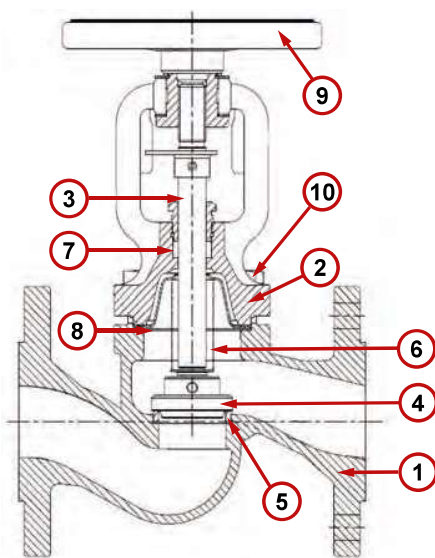

POS.	DENOMINAZIONE / PART NAME DESCRIPTION / DENOMINACION	MATERIALE / MATERIALS MATERIAUX / MATERIAL
1	Corpo, Body, Corps, Cuerpo	EN-GJL-250
2	Coperchio, Bonnet, Chapeau, Capò	EN-GJS-400-18-LT
3	Stelo, Stem, Tige, Eje	AISI 420 (1.4021)
4	Otturatore, Disc, Disc, Disco	AISI 420 (1.4021)
5	Sede, Seat, Siège, Asiento	AISI 410 (1.4006)
6	Soffietto, Bellows, Soufflet, Fuelle	AISI 316Ti (1.4571)
7	Baderna, Packing, Bague de garniture, Anillo de empaque	Grafite / Graphite / Graphite / Grafito
8	Guarnizione, Gasket, Joint Plat, Junta	Grafite / Graphite / Graphite / Grafito + CrNiSt
9	Volantino, Handwheel, Volant, Volante	Acciaio / Steel / Acier / Acero
10	Vite, Bolt, Boulon, Tornillo	8.8 - Acciaio / Steel / Acier / Acero

Pressione - Temperatura/ Pressure - Temperature/ Pression - Température/ Presión - Temperatura							
C°	-10° + 120°	+150°	+180°	+200°	+230°	+250°	+300°
BAR	16	14,4	13,4	12,8	11,8	11,2	9,6
Pressione nominale/ Nominal pressure/ Pression nominale/ presión nominal						PN 16	
Temperatura di utilizzo/ Working temperature/ Temp. de fonctionnement/ Temp. de funcionamiento						-10° C. / +300° C.	
Flangiatura/ Flanges drilled/ Brides percées/ Bridas perforados						EN 1092-2 PN 16	
Scartamento/ Face to Face/ Encombrement/ Cara-a-Cara						EN 558 Serie 1	
Collaudo/ Test/ Test/ Prueba						EN 12266-1	
Norma di riferimento/ Reference standard/ Norme de référence/ Norma de referencia						EN 13789	


www.ivalve.it
info@ivalve.it

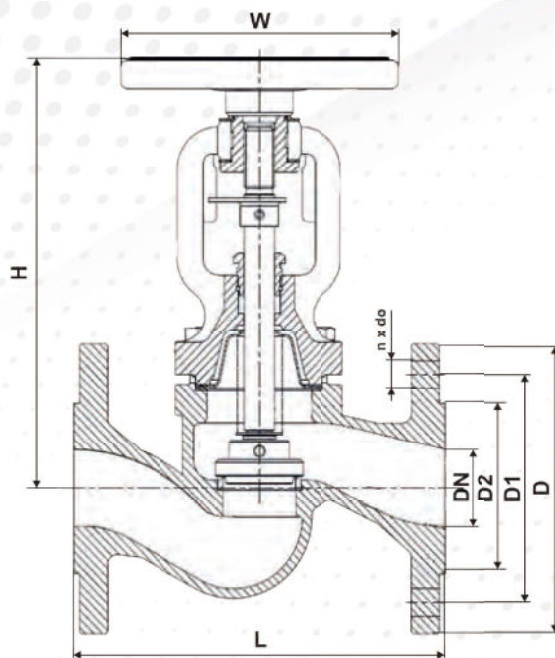KVS

	KVS												
m³/h	5,9	7,4	13	18	30	41	79	115	181	225	364	725	360
DN	15	20	25	32	40	50	65	80	100	125	150	200	250

DIMENSIONI / SIZE / TAILLE / TAMAÑO

DN	L	H	D	D2	D1	n x do	W	Kg.
15	130	178	95	46	65	4 x 14	125	3,2
20	150	178	105	56	75	4 x 14	125	3,9
25	160	193	115	65	85	4 x 14	125	4,85
32	180	201	140	76	100	4 x 19	125	6,5
40	200	224	150	84	110	4 x 19	150	9
50	230	228	165	99	125	4 x 19	150	11
65	290	270	185	118	145	4 x 19	175	15,8
80	310	295	200	132	160	8 x 19	200	24,3
100	350	325	220	156	180	8 x 19	250	35
125	400	380	250	184	210	8 x 19	300	49
150	480	427	285	211	240	8 x 23	400	76
200	600	569	340	266	295	12 x 23	500	130,5
250	730	645	405	319	355	12 x 28	500	210