



SPECIAL SEALS FOR THE CERAMIC INDUSTRY

B-PTFE



DN15 - DN100
solo AISI316




ISO 10497:2010*




fino DN150
(DN200 a richiesta)

Atex CE Ex II 2 GD*


Valvola a sfera passaggio totale
Balle valve full bore

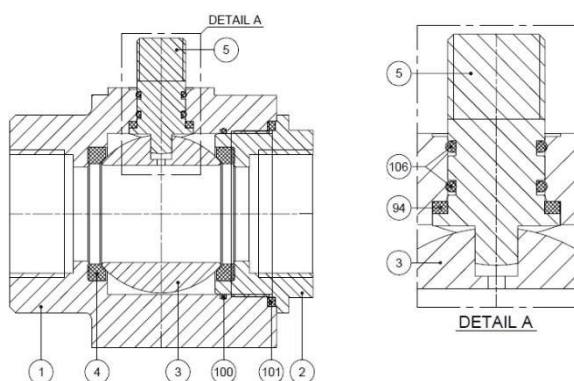

Pos.	Descrizione/Part Name	Materiale/Materials
1	Corpo / Body	A105 / A479 316
2	Chiusura / Closure	A105 / A479 316
3	Sfera / Ball	A479 316
4	Guarnizioni sfera / Seat Ball	PTFE / DEVLON / B-PTFE
5	Stelo / Stem	A479 316 / 17-4-PH
94	Tenuta stelo / Thrust body gasket	PTFE
100	o-ring chiusura / First body gasket	VITON / VITON GLT
101	o-ring chiusura / First body gasket	GRAPHITE / PTFE
106	o-ring stelo / First Stem gasket	VITON / VITON GLT

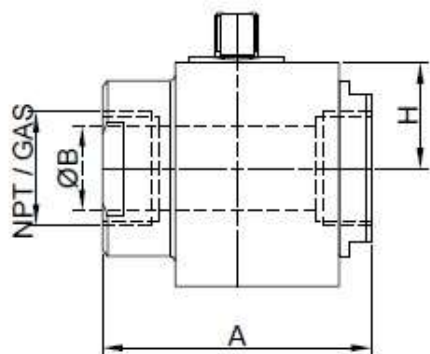

DN	A	ØB	H	ISO 5211
1/2"	70	14	24,3	F 04
3/4"	80	19	27,5	F 04
1"	90	24	33,5	F05
1.1/4"	100	31	39	F 05
1.1/2"	120	38	44,5	F 05
2"	130	50	57	F 05
3"	190	76	77	F 07



Diametri / Diameter	DN 1/2" / 3"
Pressioni / Pressure	CL. 800 (120 Bar)
Limiti di temperatura / Temperature range	-40°C / +200°C
Connessioni / connections	UNI-EN 10226 FF / NPT
Stelo antiscoppio/ anti-explosion stem	OK STANDARD
Sistema Antistatico / Antistatic device	OK STANDATD
Foro di compensazione / stabilization hole	OK H 12
Attacco superiore / upper flange	ISO 5211
Collaudo / Test	EN 12266-1