



Saracinesca a corpo ovale a cuneo gommato **IT**


Long body resilient wedge gate valve **EN**

Vanne à Opérucule caoutchouc série longue **FR**

Válvula de Compuerta cuña de goma y cuerpo ovalado **ES**

SARACINESCHE

GATE VALVES | VANNES À OPERCULE
VÁLVULAS DE COMPUERTA

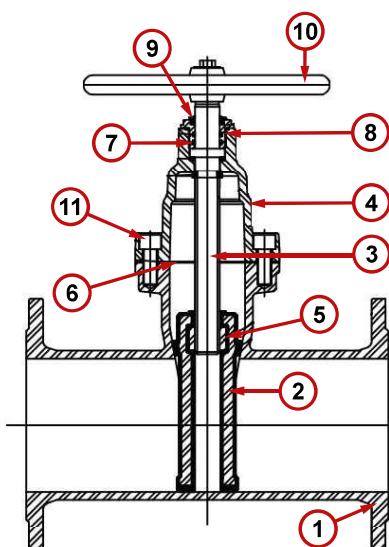

POS.	DENOMINAZIONE / PART NAME DESCRIPTION / DENOMINACION	MATERIALE / MATERIALS MATERIAUX / MATERIAL
1	Corpo, Body, Corps, Cuerpo	EN-GJS-400-15 (Epoxy coated)
2	Cuneo, Wedge, Coin, Cuna	EN-GJS-400-15 + EPDM
3	Asta, Stem, Tige, Eje	AISI 420 (1.4021)
4	Cappello, Bonnet, Chapeau, Capò	EN-GJS-400-15 (Epoxy coated)
5	Madrevite, Stem Nut, Écrou, Tuerca	Ottone / Brass / Laiton / Latòn
6	Guarnizione, Gasket, Joint Plat, Junta	EPDM
7	O-Ring	EPDM
8	Boccola, Bushing, Bague, Cojinete	Ottone / Brass / Laiton / Latòn
9	Parapolvere, Dust Guard, Pare-Poussière, Anillo Guardapolvo	EPDM
10	Volantino, Handwheel, Volant, Volante	EN-GJS-400-15 (Epoxy coated)
11	Vite, Bolt, Boulon, Tornillo	Acciaio galvanizzato / Galvanized steel - 8.8 Acier galvanisé / Acero galvanizado - 8.8

Pressione nominale/ Nominal pressure/ Pression nominale/ Presión nominal

PN 16

Temperatura di utilizzo/ Working temperature/ Temp. de fonctionnement/ Temp. de funcionamiento

-10° C. / +85° C.

Flangiatura/ Flanges drilled/ Brides percées/ Bidas perforados

EN 1092-2 PN 10 / PN 16

Scartamento/ Face to Face/ Encombrement/ Cara-a-Cara

EN 558 Serie 14

Collaudo/ Test/ Test/ Prueba


EN 12266-1

Norma di riferimento/ Reference standard/ Norme de référence/ Norma de referencia

EN 1171

Prodotto conforme al decreto del ministero della salute 6 Aprile 2004 n° 174
Certificato di prodotto n° ICIM-CAP-008674-00



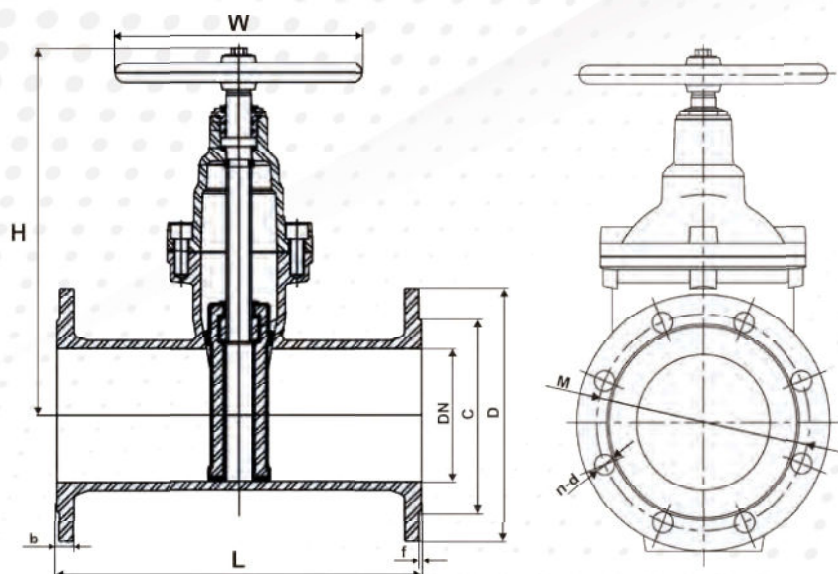

DIMENSIONI / SIZE / TAILLE / TAMAÑO

DN	L	D	M	C	b	f	n-d	H	W	Kg.
40	240	150	110	84	19	3	4-19	200	130	8
50	250	165	125	99	19	3	4-19	225	130	10,8
65	270	185	145	118	19	3	4-19	246	130	13,4
80	280	200	160	132	19	3	8-19	285	150	16,4
100	300	220	180	156	19	3	8-19	332	185	22,8
125	325	250	210	184	19	3	8-19	385	185	34
150	350	285	240	211	19	3	8-23	420	195	43,5
200	400	340	295	266	20	3	12-23	520	225	72,5
250	450	405	355	319	22	3	12-28	635	245	113
300	500	460	410	370	24,5	4	12-28	713	285	148