



Valvola a flusso avviato a vite esterna con soffiETTO IT

Bellows sealed stop valve EN


Robinet à soupape d'arrêt à soufflet FR

Válvula de Interrupción con Fuelle ES

VALVOLE A FLUSSO AVVIATO E VALVOLE DI BILANCIAMENTO

GLOBE VALVES AND BALANCING VALVES | ROBINETS À SOUPAPE ET VANNES D'ÉQUILIBRAGE |

VÁLVULAS DE GLOBO Y VÁLVULAS DE EQUILIBRADO

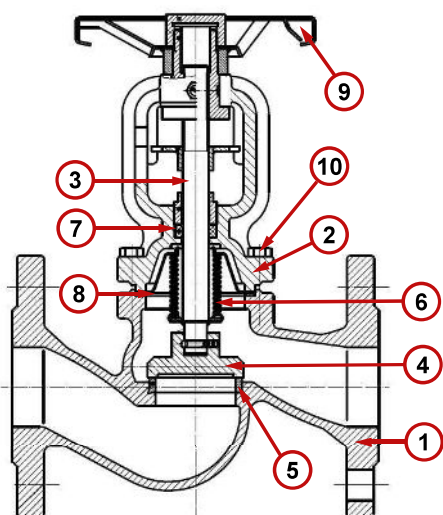

POS.	DENOMINAZIONE / PART NAME DESCIPTION / DENOMINACION	MATERIALE / MATERIALS MATERIAUX / MATERIAL
1	Corpo, Body, Corps, Cuerpo	EN-GJS-400-15
2	Coperchio, Bonnet, Chapeau, Capò	EN-GJS-400-15
3	Stelo, Stem, Tige, Eje	AISI 420 (1.4021)
4	Otturatore, Disc, Disc, Disco	AISI 420 (1.4021)
5	Sede, Seat, Siège, Asiento	AISI 304 (1.4301)
6	Soffietto, Bellows, Soufflet, Fuelle	AISI 304 (1.4301)
7	Baderna, Packing, Bague de garniture, Anillo de empaque	Grafite / Graphite / Graphite / Grafito
8	Guarnizione, Gasket, Joint Plat, Junta	Grafite / Graphite / Graphite / Grafito + AISI 304
9	Volantino, Handwheel, Volant, Volante	Acciaio / Steel / Acier / Acero
10	Vite, Bolt, Boulon, Tornillo	8.8 - Acciaio / Steel / Acier / Acero


	Pressione - Temperatura/ Pressure - Temperature/ Pression - Température/ Presión - Temperatura						
C°	-10° + 120°	+150°	+200°	+250°	+300°	+250°	+300°
BAR	16	15,5	14,7	13,9	12,8	11,2	9,6

Pressione nominale/ Nominal pressure/ Pression nominale/ presión nominal	PN 16
Temperatura di utilizzo/ Working temperature/ Temp. de fonctionnement/ Temp. de funcionamiento	-10° C. / +300° C.
Flangiatura/ Flanges drilled/ Brides percées/ Bidas perforados	EN 1092-2 PN 16
Scartamento/ Face to Face/ Encombrement/ Cara-a-Cara	EN 558 Serie 1
Collaudo/ Test/ Test/ Prueba	EN 12266-1
Norma di riferimento/ Reference standard/ Norme de référence/ Norma de referencia	EN 13789



www.ivalve.it info@ivalve.it



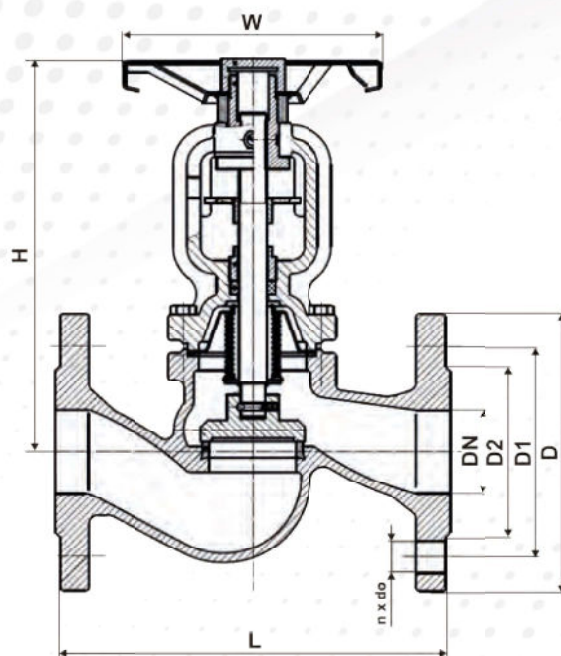

KVS

	5,9	7,4	13	18	30	41	79	115	181	225	364	725	360
m³/h													
DN	15	20	25	32	40	50	65	80	100	125	150	200	250

DIMENSIONI / SIZE / TAILLE / TAMAÑO

DN	L	H	D	D2	D1	n x do	W	Kg.
15	130	192	95	46	65	4 x 14	100	3,2
20	150	195	105	56	75	4 x 14	100	4,0
25	160	206	115	65	85	4 x 14	120	5,2
32	180	217	140	76	100	4 x 19	120	7,5
40	200	236	150	84	110	4 x 19	140	9,0
50	230	239	165	99	125	4 x 19	140	11,5
65	290	251	185	118	145	4 x 19	200	15,0
80	310	279	200	132	160	8 x 19	200	21,0
100	350	347	220	156	180	8 x 19	240	27,0
125	400	391	250	184	210	8 x 19	280	47,0
150	480	425	285	211	240	8 x 23	315	58,0
200	600	478	340	266	295	12 x 23	360	96,0
250	730	645	405	319	355	12 x 28	500	210