


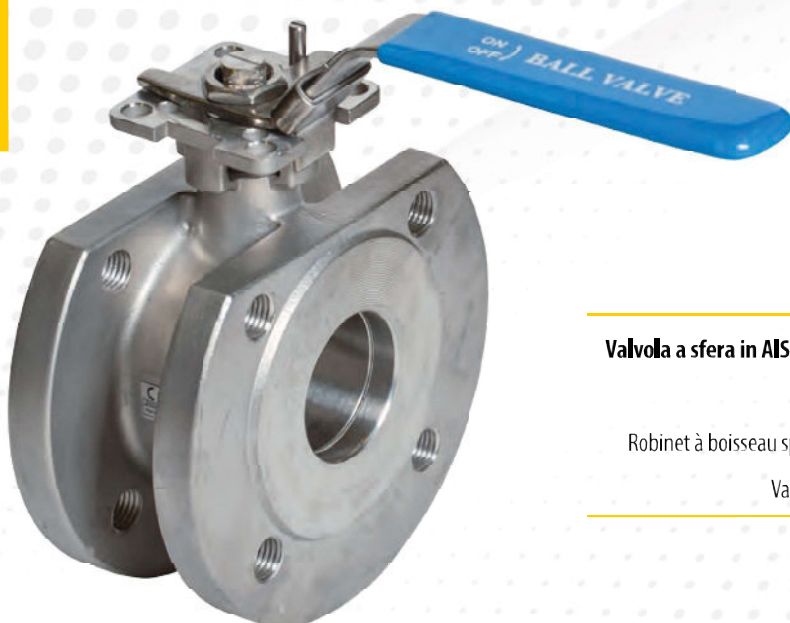

Valvola a sfera in AISI 316 tipo WAFER PN16 - Passaggio totale **IT**


Full bore stainless steel ball valve **EN**

Robinet à biseau sphérique en acier inoxydable à passage intégral **FR**

Valvula de bola en acero inoxidable de paso total **ES**


VALVOLE A SFERA

BALL VALVES | ROBINETS A BOISSEAU
SPHÉRIQUE | VALVULAS DE BOLA

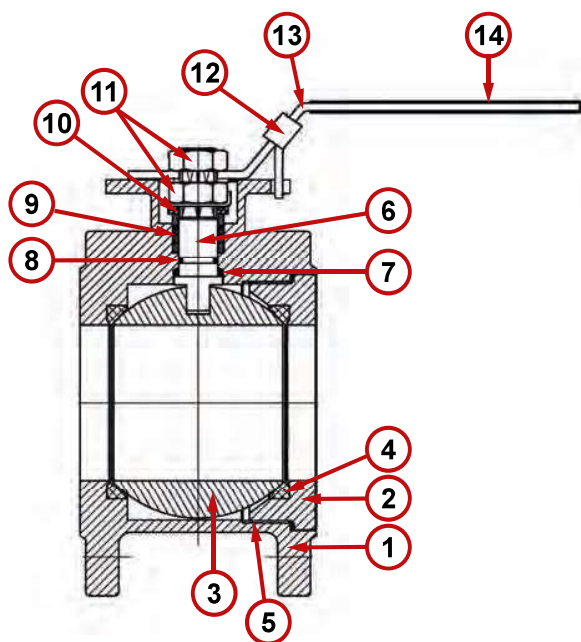

POS.	DENOMINAZIONE / PART NAME DESCRIPTION / DENOMINACION	MATERIALE / MATERIALS MATERIAUX / MATERIAL
1	Corpo, Body, Corps, Cuerpo	AISI 316 - CF8M (1.4408)
2	Ghiera, End connection, Raccords, Terminal	AISI 316 - CF8M (1.4408)
3	Sfera, Ball, Bille, Bola	AISI 316 - CF8M (1.4408)
4	Guarnizione sfera, Ball seat, Joint de tenue bille, Asiento esfera	RTFE
5	Guarnizione, Gasket, Joint, Junta	PTFE
6	Asta, Stem, Tige, Eje	AISI 316 (1.4401)
7	Rondella asta, Thrust washer, Rondelle de l'axe, Arandela de eje	PTFE
8	O-ring	VITON
9	Tenuta sull'asta, Stem Packing, Bague de garniture, Anillo de empaque	PTFE
10	Molla a tazza, Belleville washer, Ressort à disques, Muelle contenedor	AISI 301 (1.4310)
11	Dado, Nut, Ecrou, Tuerca	AISI 304 (1.4301)
12	Blocco leva, Locking pad, Dispositif de blocage, Dispositivo de bloqueo	AISI 304 (1.4301)
13	Leva, Handle, Poignée, Palanca	AISI 304 (1.4301)
14	Rivestimento leva, Handle cover, Revêtement poignée, Tapa palanca	PLASTIC

Pressione nominale/ Nominal pressure/ Pression nominale/ Presión nominal	DN 15 - DN 50: PN 40 DN 65 - DN 100: PN 16
Temperatura di utilizzo/ Working temperature/ Temp. de fonctionnement/ Temp. de funcionamiento	-20 °C / +150 °C
Raccordabile con flange/ Connectable to Flanges/ Raccordable avec brides/ Conectable con bridas	EN 1092-1 PN 10 - 16 - 40
Collaudo / Test / Test / Prueba	EN 12266-1

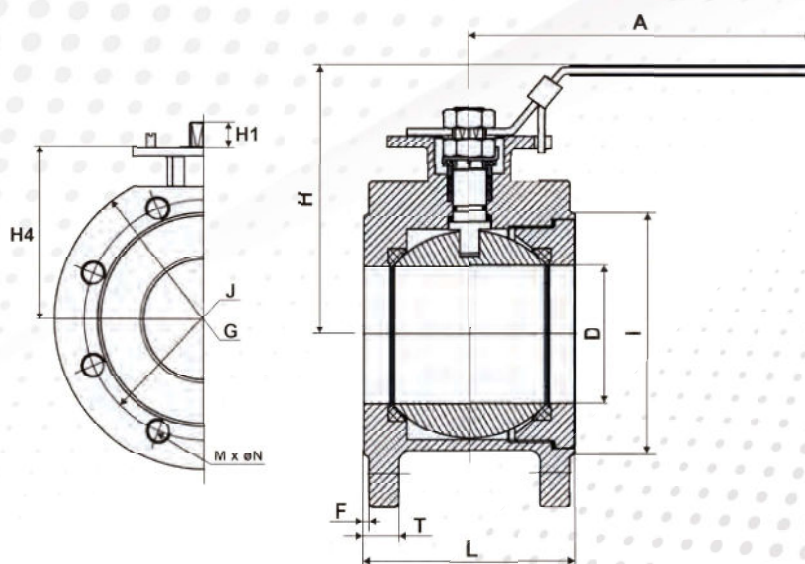

DIMENSIONI / SIZE / TAILLE / TAMAÑO													
DN	L	D	H	H1	H4	A	G	J	I	F	T	M x Ø N	Kg.
15	43	15	85	8,5	50,5	112	95	65	45	2	7	4 x M12	1,3
20	44	20	90	8,5	57	112	105	75	58	2	7	4 x M12	1,6
25	51	25	102	10,5	62	136	115	85	68	2	7,5	4 x M12	2,2
32	56	32	112	11,4	71,5	185	140	100	78	2	18	4 x M16	4
40	65	38	118	14	86	198	150	110	88	3	18	4 x M16	4,8
50	80	50	126	14	93	198	165	125	102	3	20	4 x M16	6,5
65	102	64	150	18	105	267	185	145	122	3	20	4 x M16	9,3
80	122	76	160	18	115	267	200	160	138	3	20	8 x M16	12,9
100	153	96	196	18	132	267	220	180	158	3	20	8 x M16	19,9

DISPONIBILE CON | AVAILABLE WITH | DISPONIBLE AVEC | DISPONIBLE CON



ATTUATORE PNEUMATICO | PNEUMATIC ACTUATOR |
ACTIONNEUR PNEUMATIQUE | ACTUADOR PNEUMATICO



ATTUATORE ELETTRICO | ELECTRIC ACTUATOR |
ACTIONNEUR ELECTRIQUE | ACTUADOR ELECTRICO