



Saracinesca ASME classe 150 lbs A216 WCB / trim 8 **IT**


Cast steel gate valve ASME class 150 lbs **EN**

Vanne à Opérécule en acier moulé ASME class 150 lbs **FR**

Válvula de Compuerta de acero fundido ASME class 150 lbs **ES**

SARACINESCHE

GATE VALVES | VANNES À OPERCULE |
VÁLVULAS DE COMPUERTA

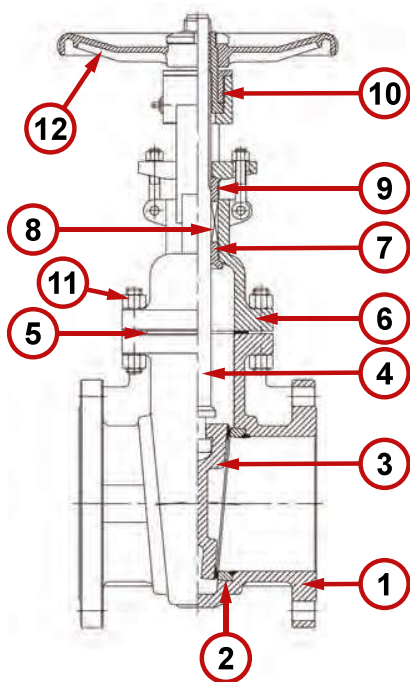

POS.	DENOMINAZIONE / PART NAME DESCRIPTION / DENOMINACION	MATERIALE / MATERIALS MATERIAUX / MATERIAL
1	Corpo, Body, Corps, Cuerpo	A216 WCB
2	Sede del corpo, Body seat, Siège du corps, Asiento del cuerpo	A105 + STL Face
3	Cuneo, Wedge, Coin, Cuna	A216 WCB + 13CR
4	Asta, Stem, Tige, Eje	13CR
5	Guarnizione, Gasket, Joint Plat, Junta	AISI 304 + Graphite
6	Cappello, Bonnet, Chapeau, Capò	A216 WCB
7	Portastoppa, Stuffing box, Presse-étoupe, Prensaestopas	WCB + 13CR
8	Baderna, Packing, Bague de garniture, Anillo de empaque	Grafite / Graphite / Graphite / Grafito
9	Premistoppa, Packing gland, Presse-étoupe, Prensaestopas	WCB + 13CR
10	Madrevite, Stem Nut, Écrou, Tuerca	QT450
11	Vite, Bolt, Boulon, Tornillo	A193 B7/2H
12	Volantino, Handwheel, Volant, Volante	EN-GJL-250

Pressione nominale/ Nominal pressure/ Pression nominale/ presión nominal

150 LBS

Temperatura di utilizzo/ Working temperature/ Temp. de fonctionnement/ Temp. de funcionamiento

-29° C. / +425° C.

Flangiatura/ Flanges drilled/ Brides percées/ Bidas perforados

ASME B16.5

Scartamento/ Face to Face/ Encombrement/ Cara-a-Cara


ASME B16.10

Design

API 600

Pressure Test

API STD.598

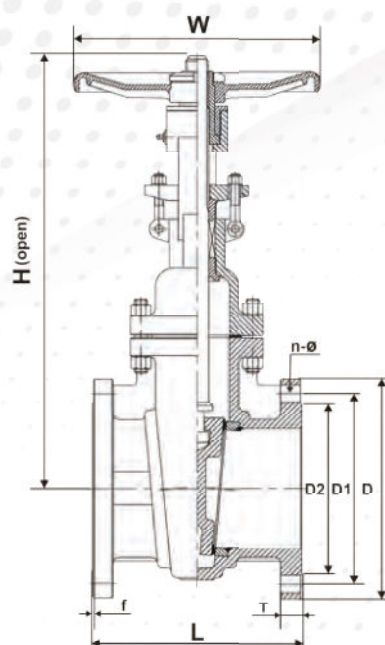

DIMENSIONI / SIZE / TAILLE / TAMAÑO

DN	L	H	D	D1	D2	f	n - Ø	T	W	Kg.
2"	178	403	152	120,5	92	1,6	4 - 19	16	200	17,5
2 1/2"	190	435	178	139,5	105	1,6	4 - 19	17,5	200	22,5
3"	203	485	190	152,5	127	1,6	4 - 19	19	250	29,5
4"	229	587	229	190,5	157	1,6	8 - 19	24	250	45
5"	254	673	254	216	186	1,6	8 - 22	24	280	65
6"	267	767	279	241,5	216	1,6	8 - 22	26	280	70
8"	292	955	345	298,5	270	1,6	8 - 22	29	350	115
10"	330	1146	406	362	324	1,6	12 - 25	31	450	164
12"	356	1328	483	432	381	1,6	12 - 25	32	500	254