



Valvola a globo classe 800 lbs A105N/trim 8 - Passaggio ridotto IT

Forged steel globe valve class 800 lbs - Reduced bore EN


Robinet à Soupape en acier forgé class 800 lbs - Passage réduit FR

Válvula de Globo de acero forjado clase 800 lbs - Paso reducido ES

VALVOLE A FLUSSO AVVIATO E VALVOLE DI BILANCIAMENTO


GLOBE VALVES AND BALANCING VALVES | ROBINETS À SOUPAPE ET VANNES D'ÉQUILIBRAGE |

VÁLVULAS DE GLOBO Y VÁLVULAS DE EQUILIBRADO

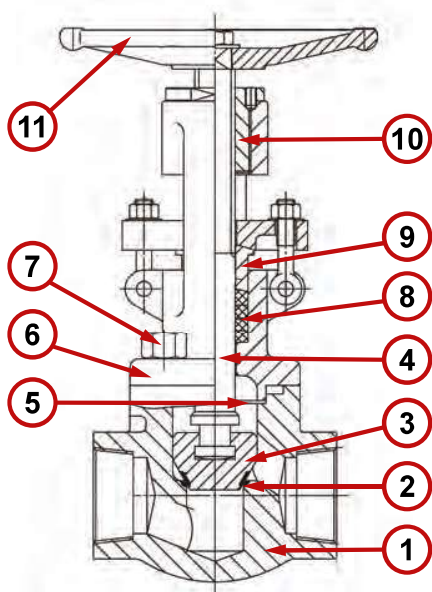

POS.	DENOMINAZIONE / PART NAME DESCRIPTION / DENOMINACION	MATERIALE / MATERIALS MATERIAUX / MATERIAL
1	Corpo, Body, Corps, Cuerpo	ASTM A105N
2	Sede del corpo, Body seat, Siège du corps, Asiento del cuerpo	STELLITE
3	Otturatore, Disc, Disc, Disco	AISI 420 (1.4021)
4	Asta, Stem, Tige, Eje	AISI 410 (1.4006)
5	Guarnizione, Gasket, Joint Plat, Junta	Graphite + AISI 304 (1.4350)
6	Cappello, Bonnet, Chapeau, Capò	ASTM A105N
7	Vite, Bolt, Boulon, Tornillo	ASTM A193 B7M
8	Baderna, Packing, Bague de garniture, Anillo de empaque	Grafite / Graphite / Graphite / Grafito
9	Premistoppa, Packing gland, Presse-étoupe, Prensaestopas	ASTM A105N
10	Madrevite, Stem nut, Écrou, Tuerca	AISI 410 (1.4006)
11	Volantino, Handwheel, Volant, Volante	ASTM A47 32510

Pressione nominale/ Nominal pressure/ Pression nominale/ presión nominal	Class 800 LBS
Temperatura di utilizzo/ Working temperature/ Temp. de fonctionnement/ Temp. de funcionamiento	-29° C. / +425° C.
Filettatura/ Thread/ Filetage/ Hilo	NPT ANSI B1.20.1
NACE Material	NACE MR-0175
Design	API 602
Pressure Test	API STD.598

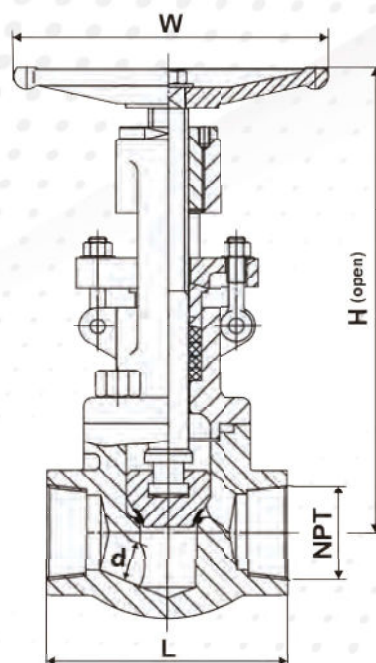

DIMENSIONI / SIZE / TAILLE / TAMAÑO

Ø	L	H	d	W	Kg.
1/2"	79	176	10,5	100	1,94
3/4"	92	176	13	100	2,1
1"	111	212	17,5	125	3,45
1 1/4"	120	230	23	160	5,34
1 1/2"	152	254	28	160	5,77
2"	172	294	36	180	9,31



Valvola a globo classe 800 lbs A105N/trim 8 - Passaggio ridotto

Forged steel globe valve class 800 lbs - Reduced bore

Robinet à Soupape en acier forgé class 800 lbs - Passage réduit

Válvula de Globo de acero forjado clase 800 lbs - Paso reducido

IT

EN


FR

ES

VALVOLE A FLUSSO AVVIATO E VALVOLE DI BILANCIAMENTO


GLOBE VALVES AND BALANCING VALVES | ROBINETS À SOUPAPE ET VANNES D'ÉQUILIBRAGE |

VÁLVULAS DE GLOBO Y VÁLVULAS DE EQUILIBRADO

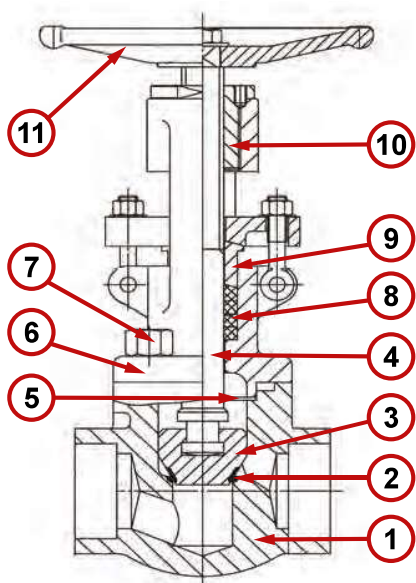

POS.	DENOMINAZIONE / PART NAME DESCRIPTION / DENOMINACION	MATERIALE / MATERIALS MATERIAUX / MATERIAL
1	Corpo, Body, Corps, Cuerpo	ASTM A105N
2	Sede del corpo, Body seat, Siège du corps, Asiento del cuerpo	STELLITE
3	Otturatore, Disc, Disc, Disco	AISI 420 (1.4021)
4	Asta, Stem, Tige, Eje	AISI 410 (1.4006)
5	Guarnizione, Gasket, Joint Plat, Junta	Graphite + AISI 304 (1.4350)
6	Cappello, Bonnet, Chapeau, Capò	ASTM A105N
7	Vite, Bolt, Boulon, Tornillo	ASTM A193 B7M
8	Baderna, Packing, Bague de garniture, Anillo de empaque	Grafite / Graphite / Graphite / Grafito
9	Premistoppa, Packing gland, Presse-étoupe, Prensaestopas	ASTM A105N
10	Madrevite, Stem nut, Écrou, Tuerca	AISI 410 (1.4006)
11	Volantino, Handwheel, Volant, Volante	ASTM A47 32510

Pressione nominale/ Nominal pressure/ Pression nominale/ presión nominal	Class 800 LBS
Temperatura di utilizzo/ Working temperature/ Temp. de fonctionnement/ Temp. de funcionamiento	-29° C. / +425° C.
Connessioni/ Connections/ Connexions/ Conexiones	SW
NACE Material	NACE MR-0175
Design	API 602
Pressure Test	API STD.598

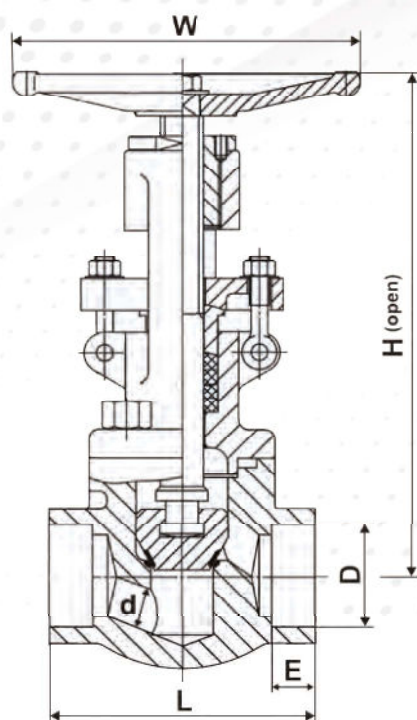

DIMENSIONI / SIZE / TAILLE / TAMAÑO							
Ø	L	H	d	D	E	W	Kg.
1/2"	79	176	10,5	21,9	10	100	1,94
3/4"	92	176	13	27,3	13	100	2,1
1"	111	212	17,5	34	13	125	3,45
1 1/4"	120	230	23	42,8	13	160	5,34
1 1/2"	152	254	28	48,9	13	160	5,77
2"	172	294	36	61,4	16	180	9,31