



Valvola inox 3 pezzi - Passaggio totale **IT**


Stainless steel full port ball valve, 3 pieces **EN**

Vanne à boisseau sphérique 3 voies en acier inox **FR**

Valvula de bola en acero inoxidable de paso total **ES**

VALVOLE A SFERA

BALL VALVES | ROBINETS A BOISSEAU
SPHÉRIQUE | VALVULAS DE BOLA

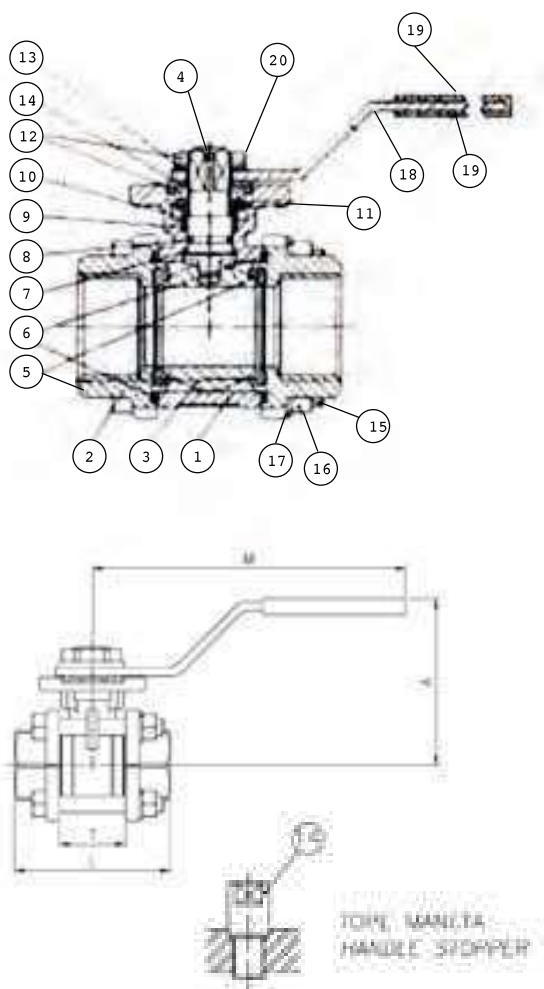

POS.	DENOMINAZIONE / PART NAME DESCRIPTION / DENOMINACION	MATERIALE / MATERIALS MATERIAUX / MATERIAL
1	Corpo, Body, Corps, Cuerpo	INOX AISI 316
2	Coperchio, Cap	INOX AISI 316
3	Sfera, Ball, Bille, Bola	INOX AISI 316
4	Stelo, Stem	INOX AISI 316
5	Guarnizione sede sfera, Seat ball	PTFE+15% GF
6	Guarnizione corpo-coperchio, Gasket	PTFE
7	Rondella, Thrust washer, Rondelle de l'axe, Arandela de eje	PTFE + GRAFITE, PTFE + GRAPHITE
8	O-ring Asta, O-ring	VITON
9	Guarnizione corpo-asta, Stem packing	PTFE
10	Guarnizione corpo-asta, Stem ring	INOX AISI 316
11	Rondella molla, Spring washer	INOX AISI 301
12	Dado, Nut, Erou, Tuerca	INOX AISI 304
13	Rondella, Washer	INOX AISI 304
14	Rondella di sicurezza, Stopper	INOX AISI 304
15	Bullone, Bolt	INOX AISI 304
16	Dado, Nut, Erou, Tuerca	INOX AISI 304
17	Rondella del bullone, Bolt washer	INOX AISI 304
18	Leva, Handle	INOX AISI 304
19	Rivestimento leva, Handle sleeve	VINILE / VINLY
20	Antisfilamento, Lock	INOX AISI 304

Ø	A	DIMENSIONI / SIZE / TAILLE / TAMAÑO					Kg.
		L	M	ISO 5211	H	CxC	
1/4"	60	47.6	112	F-03	10	9x9	0,39
3/8"	60	47.6	112	F-03	10	9x9	0,38
1/2"	60	56	112	F-03/ F-04	11	9x9	0,44
3/4"	70	73	138	F-04/ F-05	11	11x11	0,82
1"	70	82	138	F-04/ F-05	11	11x11	1,02
1 1/4"	88	91	160	F-05/ F-07	15	14x14	1,79
1 1/2"	94	104	205	F-05/ F-07	15	14x14	2,46
2"	100	120	205	F-05/ F-07	15	14x14	3,47
2 1/2"	150	155	330	F-07/ F-10	19	17x17	8,50
3"	165	182	330	F-07/ F-10	19	17x17	12,40
4"	175	220	340	F-07/ F-10	19	17x17	19,65

Pressione nominale/ Nominal pressure/ Pression nominale/ presión nominal	PN 64
Temperatura di utilizzo/ Working temperature/ Temp. de fonctionnement/ Temp. de funcionamiento	-20° C. / +150° C.
Filettatura/ Thread/ Filetage/ Hilo	ISO 7/1 Rp
Collaudo/ Test/ Test/ Prueba	EN 12266-1

DISPONIBILE CON | AVAILABLE WITH | DISPONIBLE AVEC | DISPONIBLE CON



ATTUATORE PNEUMATICO | PNEUMATIC ACTUATOR |
ACTIONNEUR PNEUMATIQUE | ACTUADOR NEUMATICO



ATTUATORE ELETTRICO | ELECTRIC ACTUATOR |
ACTIONNEUR ELECTRIQUE | ACTUADOR ELECTRICO