



Valvola a sfera in AISI 316 filettata F/F - Passaggio totale **IT**


Full bore stainless steel ball valve **EN**

Robinet à boisseau sphérique en acier inoxydable à passage intégral **FR**

Valvula de bola en acero inoxidable de paso total **ES**


VALVOLE A SFERA

BALL VALVES | ROBINETS A BOISSEAU
SPHÉRIQUE | VALVULAS DE BOLA

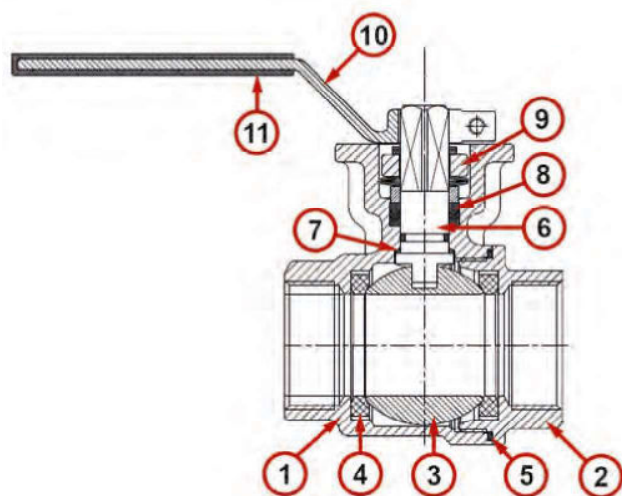

POS.	DENOMINAZIONE / PART NAME DESCRIZIONE / DENOMINACION	MATERIALE / MATERIALS MATERIAUX / MATERIAL
1	Corpo, Body, Corps, Cuerpo	AISI 316 - CF8M (1.4408)
2	Manicotto, End connection, Manchon, Terminal	AISI 316 - CF8M (1.4408)
3	Sfera, Ball, Bille, Bola	AISI 316 - CF8M (1.4408)
4	Guarnizione sfera, Ball seat, Joint de tenue bille, Asiento esfera	PTFE
5	Guarnizione, Gasket, Joint, Junta	PTFE
6	Asta, Stem, Tige, Eje	AISI 316 (1.4401)
7	Rondella asta, Thrust washer, Rondelle de l'axe, Arandela de eje	PTFE
8	Tenuta sull'asta, Stem Packing, Bague de garniture, Anillo de empaque	PTFE
9	Premistoppa, Packing gland, Presse-étoupe, Prensaestopas	AISI 304 - CF8 (1.4308)
10	Leva, Handle, Poignée, Palanca	AISI 304 - CF8 (1.4308)
11	Rivestimento leva, Handle cover, Revêtement poignée, Tapa palanca	PLASTIC

Pressione nominale/ Nominal pressure/ Pression nominale/ Presión nominal	PN 64
Temperatura di utilizzo/ Working temperature/ Temp. de fonctionnement/ Temp. de funcionamiento	EN 558 SERIE 20
Filettatura, Thread, Filetage, Hilo	EN 1092-2 PN 10 - 16
Collaudo / Test / Test / Prueba	EN 12266-1

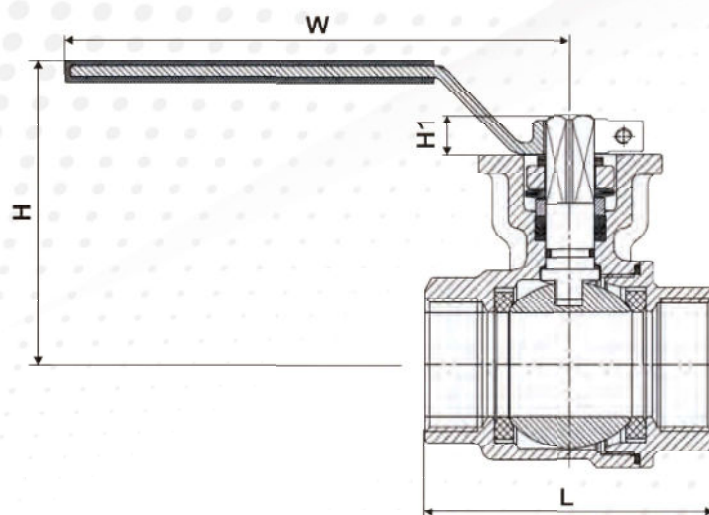

DIMENSIONI / SIZE / TAILLE / TAMAÑO							
Ø	L	H	H1	W	C	ISO 5211	Kg.
1/2"	58	74	9	123	9	F03 - F04	0,48
3/4"	67	78	9	123	9	F03 - F04	0,60
1"	78	89	11	153	11	F04 - F05	0,91
1 1/4"	90	94	11	153	11	F04 - F05	1,25
1 1/2"	104	110	14	183	14	F05 - F07	2,15
2"	126	118	14	183	14	F05 - F07	3,16

DISPONIBILE CON | AVAILABLE WITH | DISPONIBLE AVEC | DISPONIBLE CON



ATTUATORE PNEUMATICO | PNEUMATIC ACTUATOR |
ACTIONNEUR PNEUMATIQUE | ACTUADOR NEUMATICO



ATTUATORE ELETTRICO | ELECTRIC ACTUATOR |
ACTIONNEUR ELECTRIQUE | ACTUADOR ELECTRICO